



CHALMERS

Chalmers Publication Library

Simulations of trapping of diesel particulate matter in a metallic substrate with protrusions

This document has been downloaded from Chalmers Publication Library (CPL). It is the author's version of a work that was accepted for publication in:

13th Nordic Symposium on Catalysis, October 5-7, 2008, Göteborg, Sweden

Citation for the published paper:

Ström, H. ; Andersson, B. (2008) "Simulations of trapping of diesel particulate matter in a metallic substrate with protrusions". 13th Nordic Symposium on Catalysis, October 5-7, 2008, Göteborg, Sweden

Downloaded from: <http://publications.lib.chalmers.se/publication/149441>

Notice: Changes introduced as a result of publishing processes such as copy-editing and formatting may not be reflected in this document. For a definitive version of this work, please refer to the published source. Please note that access to the published version might require a subscription.

Chalmers Publication Library (CPL) offers the possibility of retrieving research publications produced at Chalmers University of Technology. It covers all types of publications: articles, dissertations, licentiate theses, masters theses, conference papers, reports etc. Since 2006 it is the official tool for Chalmers official publication statistics. To ensure that Chalmers research results are disseminated as widely as possible, an Open Access Policy has been adopted. The CPL service is administrated and maintained by Chalmers Library.

(article starts on next page)

Simulations of trapping of diesel particulate matter in a metallic substrate with protrusions

Henrik Ström and Bengt Andersson

Department of Chemical and Biological Engineering, Chemical Reaction Engineering,
Chalmers University of Technology, SE-412 96 Göteborg, Sweden

Overview

Flow-through filters may be a plausible solution for PM reduction on gasoline vehicles and for pre-filter PM capture on heavy-duty diesel vehicles in order to optimize wall-flow filter efficiency and reliability. In this study, the PM trapping characteristics of a metallic flow-through substrate with protrusions were investigated.

Modeling

The forces acting on the particles taken into consideration were the drag force, the gravitational force, the lift force, the van der Waals interaction between the particles and the walls, and the Brownian motion of the particles. The gas flow was solved for using Large Eddy Simulation. Particles are released evenly on the inlet and are assumed to always stick at walls.

Results

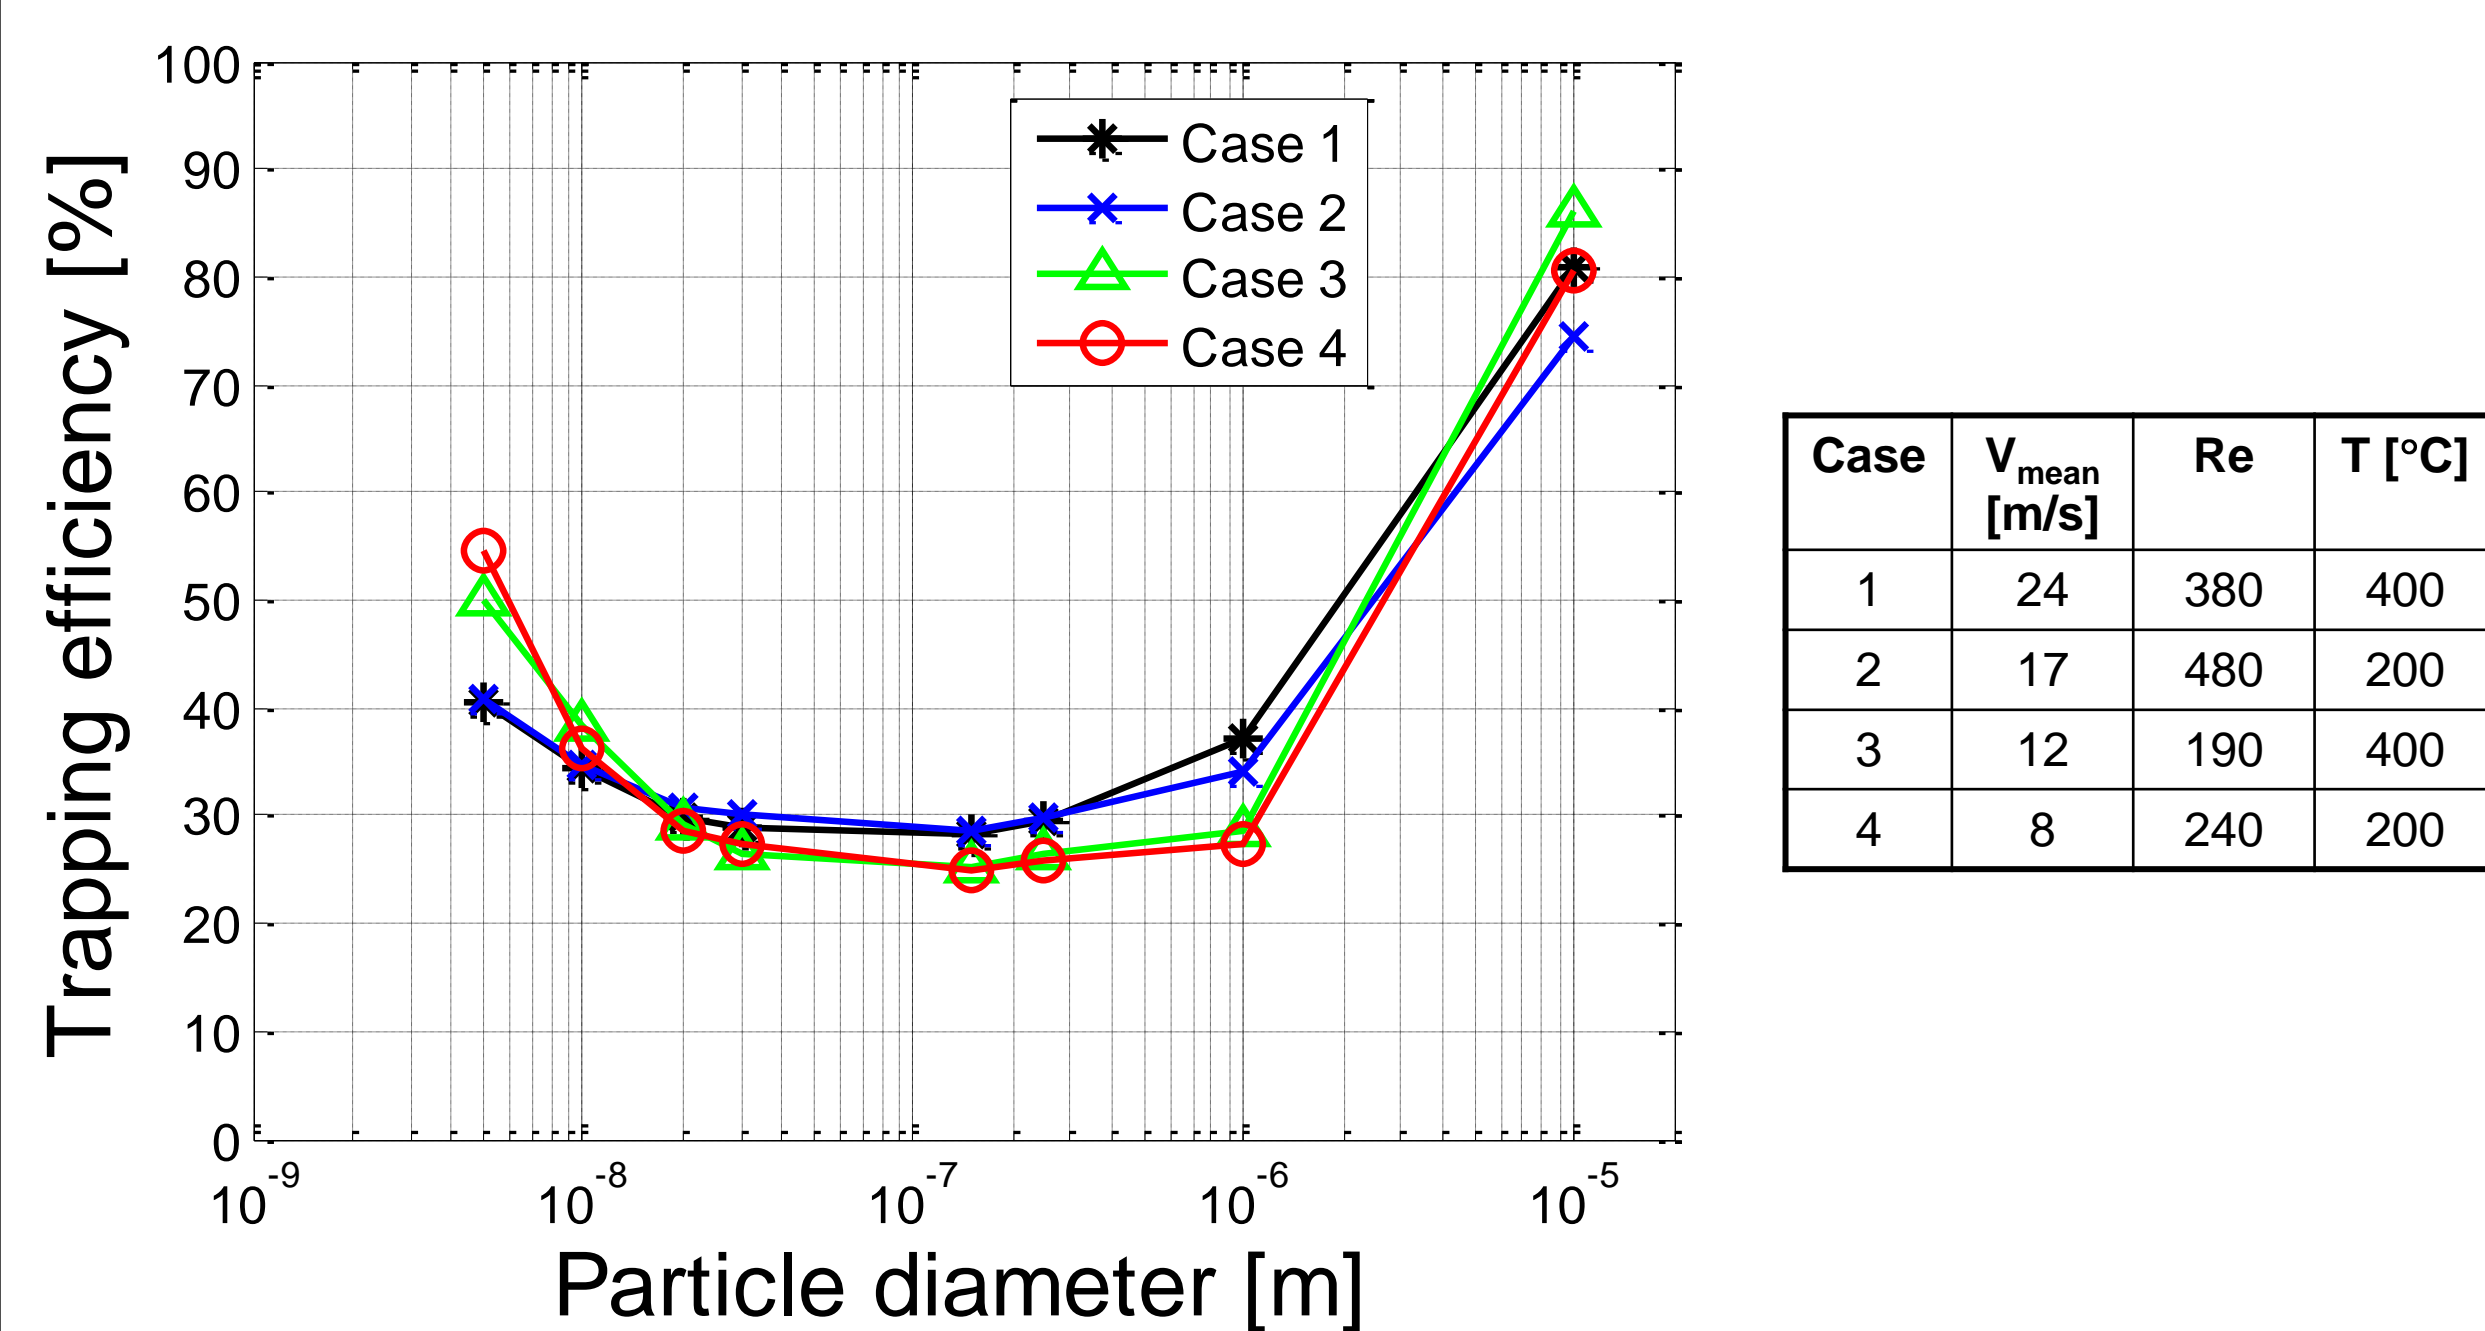


Figure 2 Particle trapping efficiency

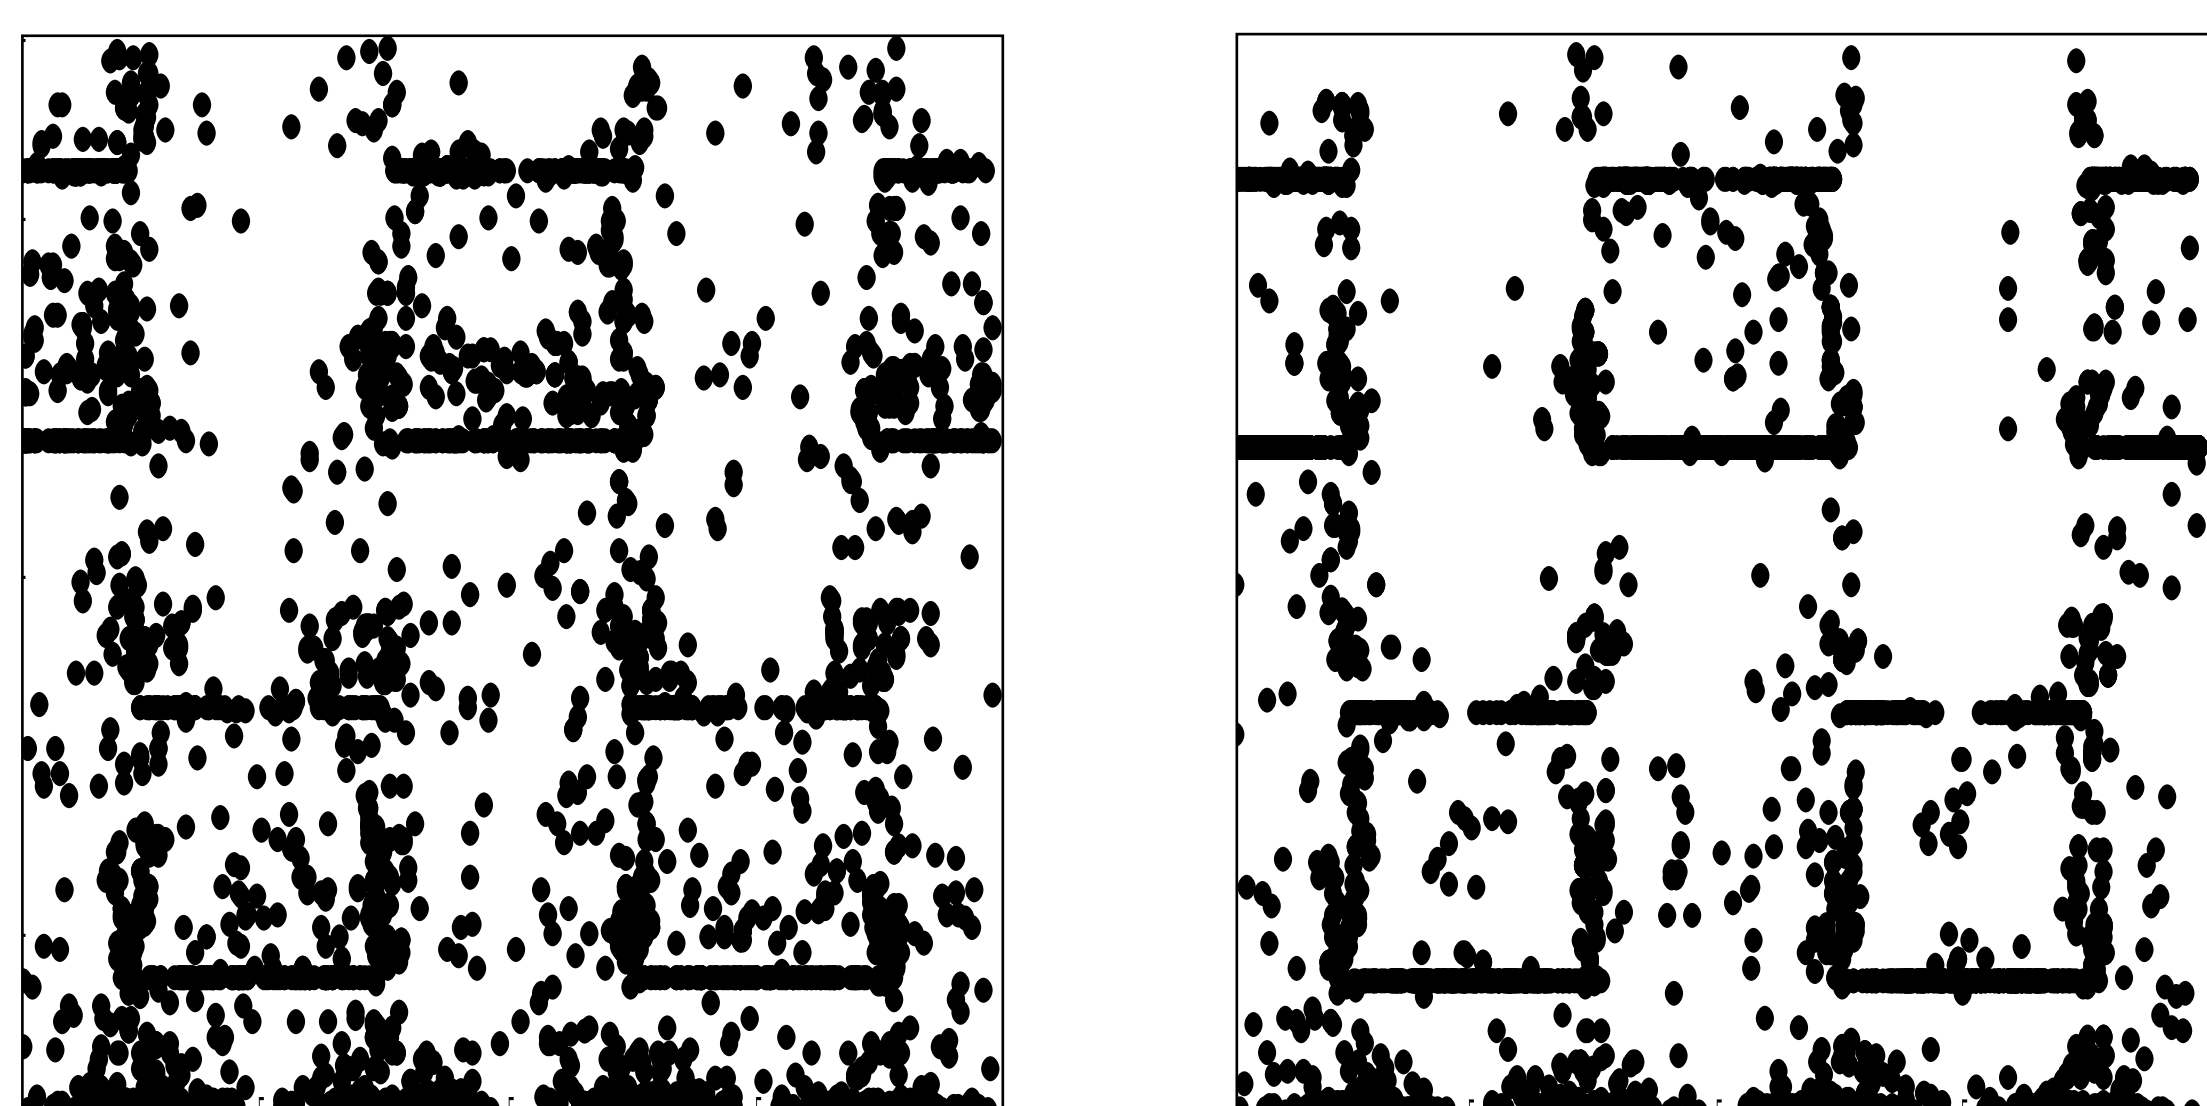


Figure 4 Patterns of particle trapping for small (20 nm; to the left) and large (1 μm ; to the right) particles. The gas flows from bottom to top and modules are shown from above. The domain is 12 modules in total and the results are layered on top of each other. 23% more particles are trapped in the right picture.

Substrate property	Measurement
Channel height	1 mm
Wall thickness	50 μm
Mesh dimensions	4 (W) x 1.05 (H) x 6 (L) mm
Substrate length	72 mm




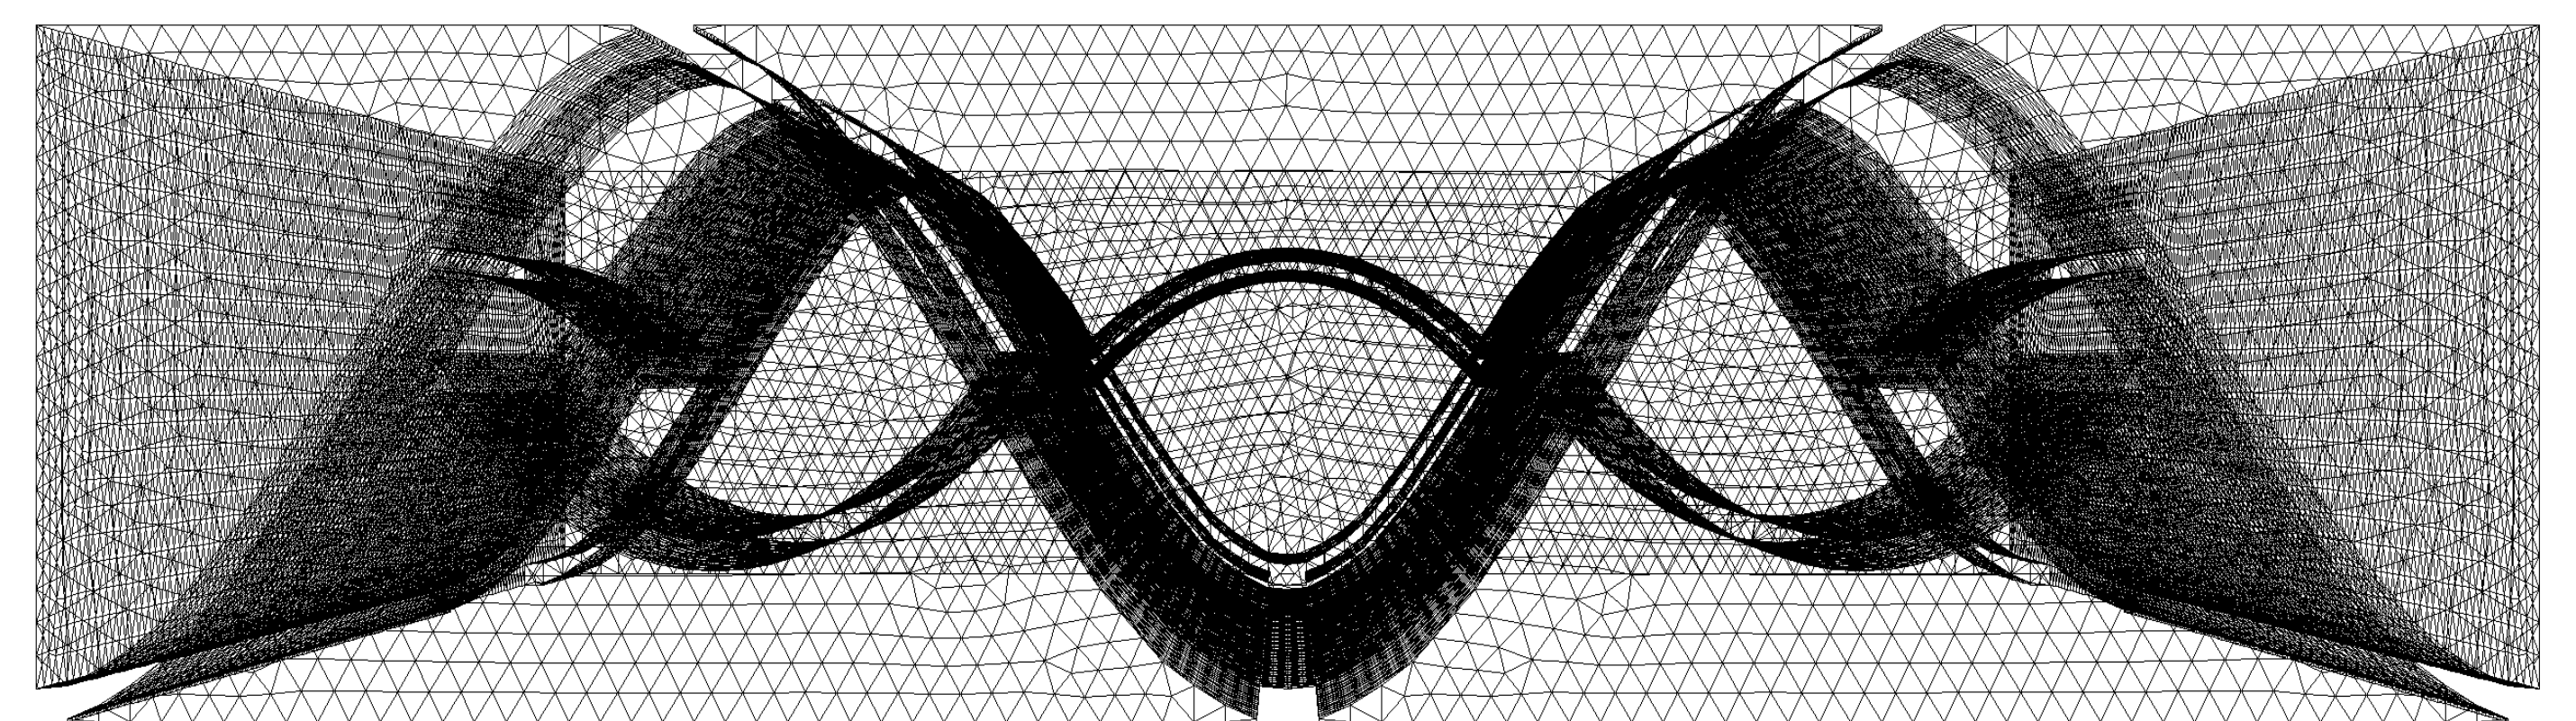



Figure 1 Computational mesh and substrate properties

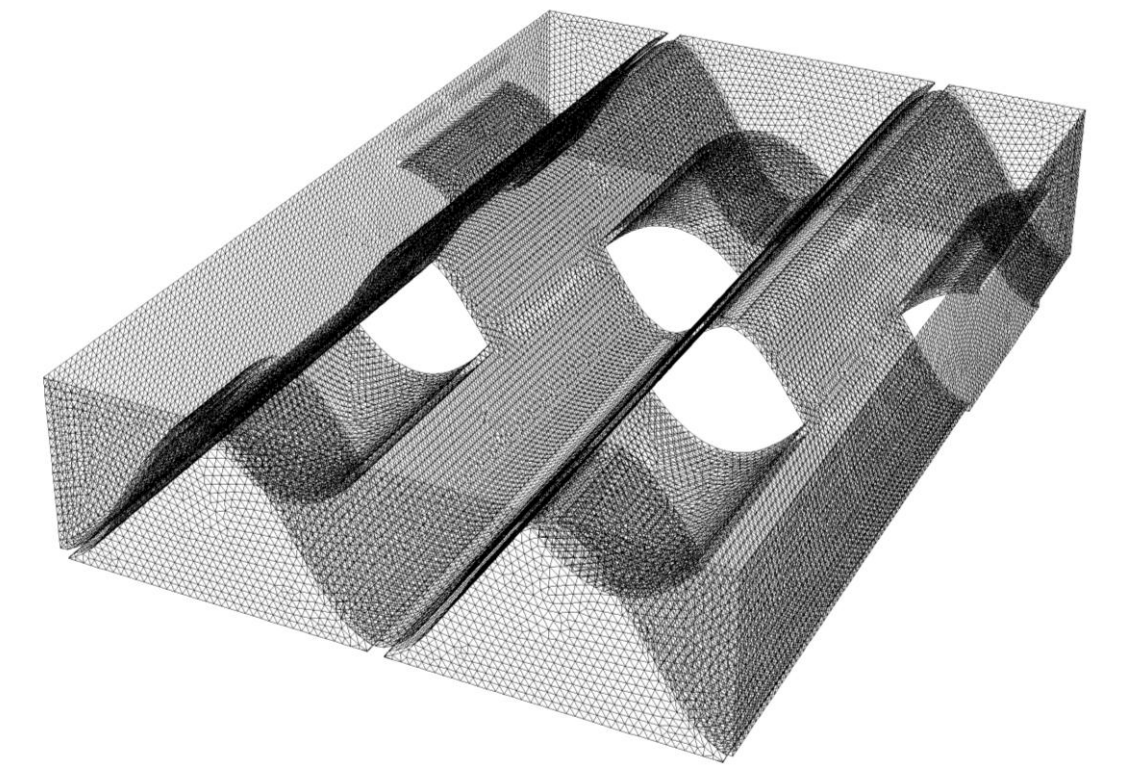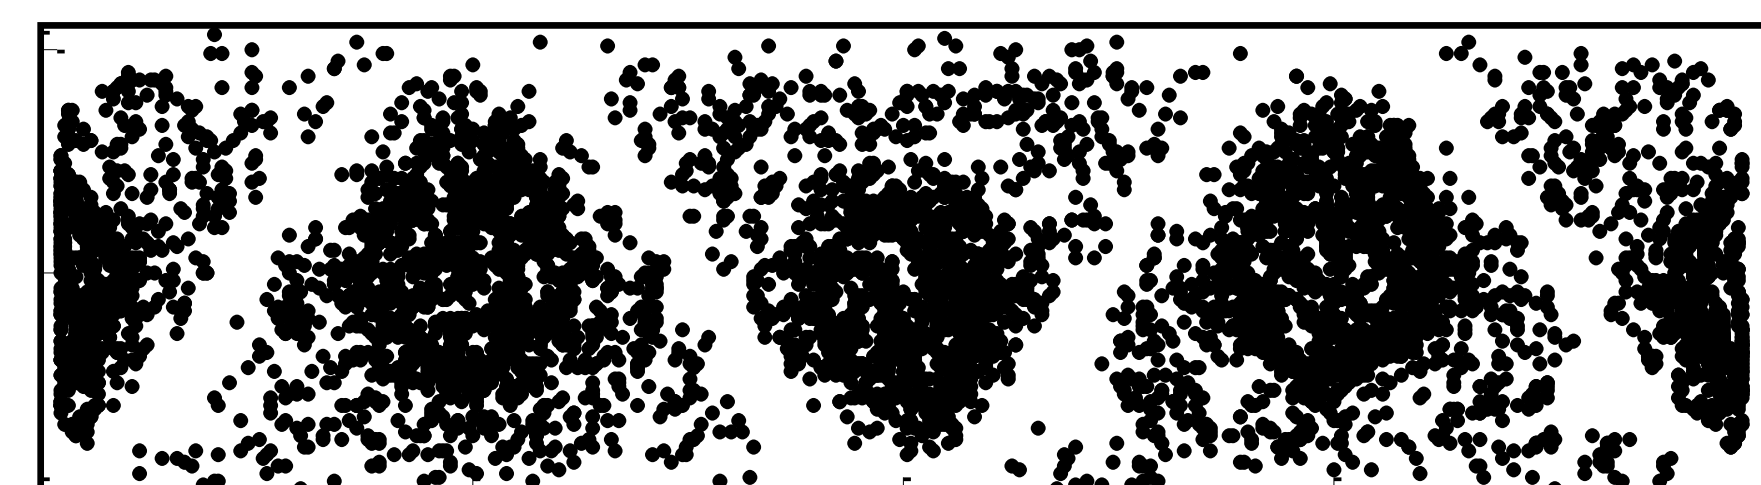


$d_p = 20 \text{ nm}$
 $\rho = 1000 \text{ kg/m}^3$

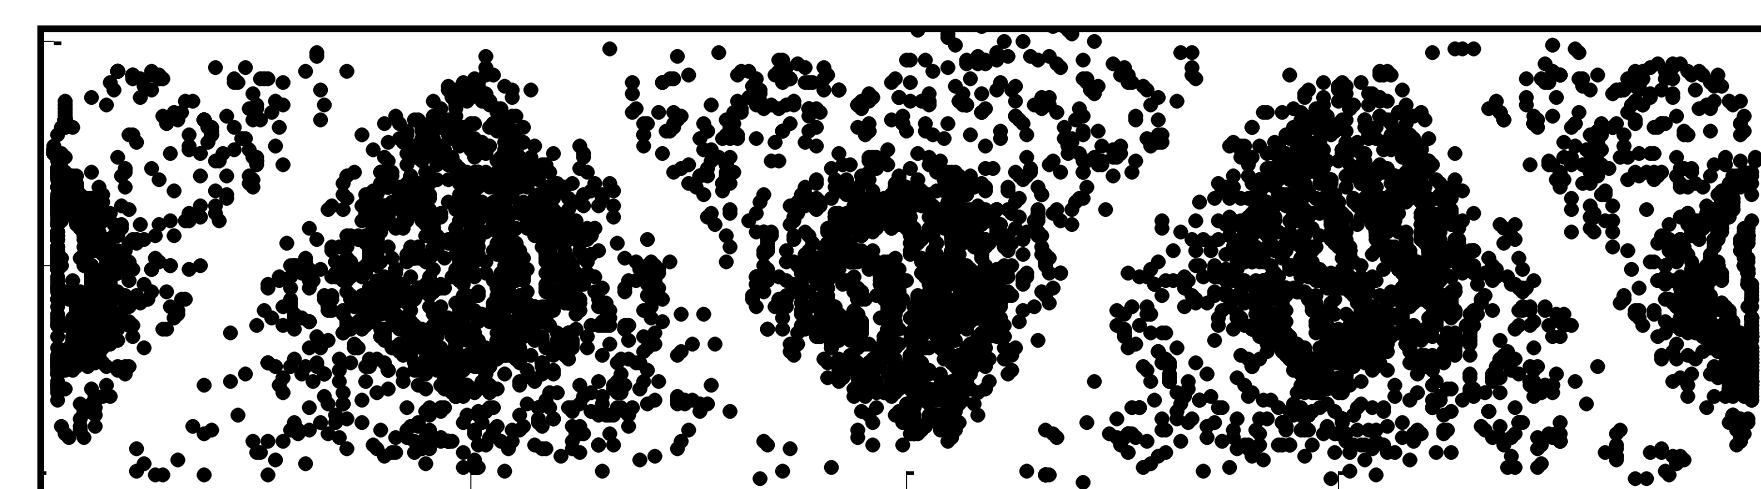

$d_p = 250 \text{ nm}$
 $\rho = 640 \text{ kg/m}^3$

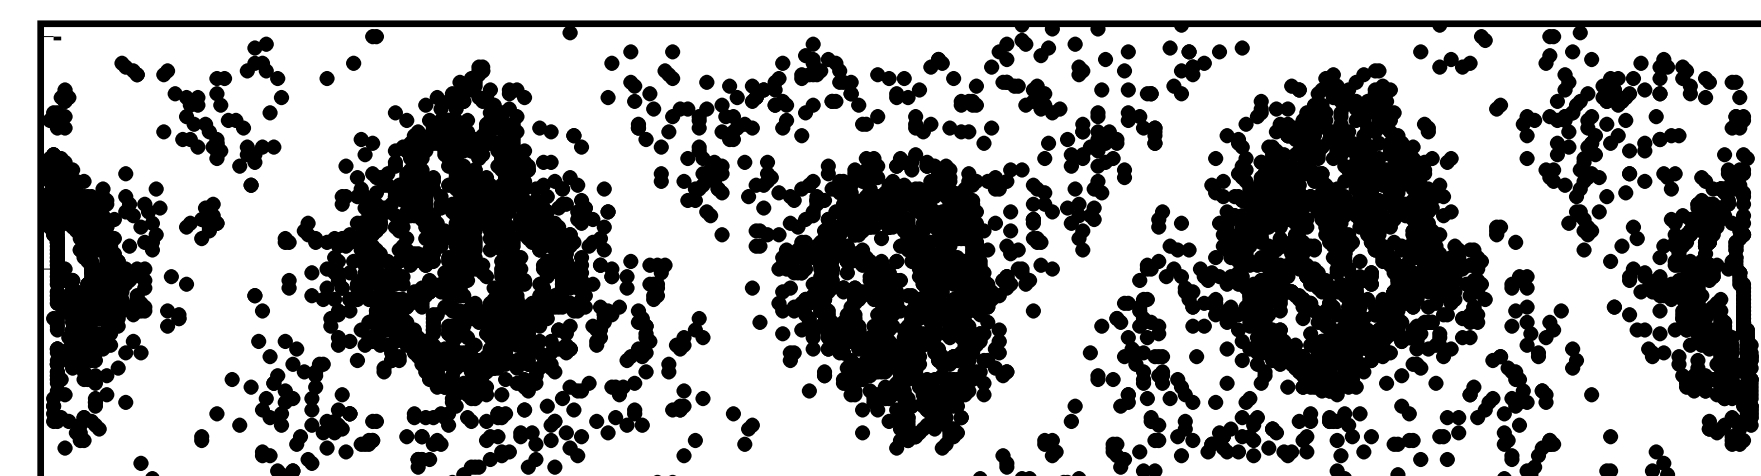

$d_p = 1 \mu\text{m}$
 $\rho = 200 \text{ kg/m}^3$

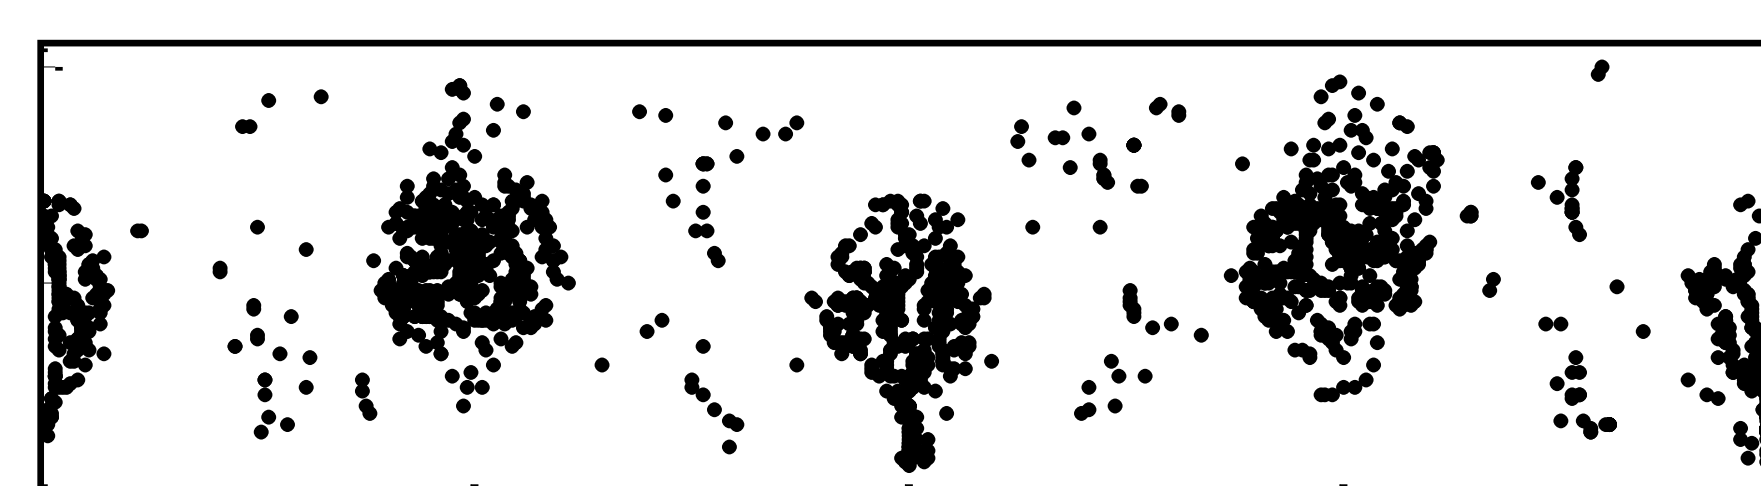

$d_p = 10 \mu\text{m}$
 $\rho = 200 \text{ kg/m}^3$

Figure 3 Particle patterns on substrate outlet for four different particle types

Conclusions

- There is a minimum trapping efficiency for medium-sized particles (around 150 nm in diameter) in this substrate (see Figure 2)
- This is due to the interaction between the two dominant trapping mechanisms (Brownian motion and inertial impaction)
- Small and large particles are trapped in different regions of the substrate (see Figure 4)
- Redistribution of particles at the edges of the protrusions are important for the dispersion of larger particles
- This model can be used to study the particle trapping efficiency of arbitrary flow-through devices in an aftertreatment system and will be further developed to also allow particle tracking inside porous structures

